

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

REC'D 25 MAY 2004

WIPO

PCT

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Scania CV AB, Södertälje SE  
Applicant (s)

(21) Patentansökningsnummer 0301507-0  
Patent application number

(86) Ingivningsdatum 2003-05-22  
Date of filing

Stockholm, 2004-05-05

För Patent- och registreringsverket  
For the Patent- and Registration Office

Görel Gustafsson

Avgift  
Fee

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

jw/

Ref.: 55728 SE

Applicant: Scania CV AB**Energy Storage****5 THE BACKGROUND OF THE INVENTION AND PRIOR ART**

The present invention relates generally to storage of electrical energy. More particularly the invention relates to an arrangement according to the preamble of claim 1 and a vehicle according to claim 9. The invention also relates to a method of  
10 charging a number of electrical storage modules according to the preamble of claim 10, a computer program according to claim 15 and a computer readable medium according to claim 16.

Recent technology development has placed a strong demand for  
15 efficient electrical power sources. For instance, in today's vehicular industry it is particularly important that any onboard generated electrical energy can be stored as efficiently as possible and constitute a reliable source of energy. Namely, the functionality of the modern vehicles is very dependent on electri-  
20 cally powered equipment. Moreover, hybrid vehicles and purely electrically propelled vehicles now begin to play an increasingly important role on the transportation market.

Therefore, highly efficient battery charging techniques are required. One example of an electrical charging system is  
25 described in the U.S. patent No. 6,215,277. Here, a control module selectively controls a charging current to one out of two batteries, which may have different output voltages. Thus, both the batteries can be charged without a DC-to-DC converter being required.

U.S. patent No. 6,462,511 discloses a pseudo-parallel charging system for charging segmented batteries, wherein a current switching device routes a charging current from a charge source to a selected battery segment while the remaining battery segments are in a relaxation mode, i.e. do not receive any charge current. Thereby, a cost-efficient solution for charging large battery packs is accomplished.

The U.S. patent No. 6,275,004 relates to an apparatus for balancing a battery module, wherein a plurality of batteries are connected in series to supply power to a vehicle. A generator voltage is here DC-to-DC converted and delivered individually to each battery in response to a measured charge condition of the specific battery. Thereby, the risk of a premature degradation of the batteries due to any imbalances in the state of charge (SOC) among the batteries may be reduced.

Hence, the prior art includes various examples of solutions for charging batteries which are advantageous with respect to different battery parameters, such as the cycle life (i.e. the number of times a battery may be recharged and discharged before it fails to meet a certain performance criterion).

However, there is yet no solution which significantly increases a battery's load capacity in respect of its usable SOC. Generally, if a voltage is fed to a battery which is equal to, or even below, the battery's nominal voltage, the battery will store an amount of energy which is less than its actual capacity. For example, a charging voltage equal to the nominal voltage may result in load capacity of 85% SOC for a standard lead-acid type of battery. By nominal voltage is here understood the output voltage which the battery is designed to deliver under normal operating conditions. Furthermore, no battery can drive a load with acceptable performance (i.e. relatively close to the nominal voltage) until it is fully discharged. Instead, the battery typically needs to be recharged when a 50%-SOC level has been reached. Consequently, if a standard battery is charged with a nominal voltage,

its effective range of operation will be limited to an interval between 85% SOC and 50% SOC. Naturally, it is desirable to expand this interval and thus increase the battery's capacity.

One way to accomplish a broadening of the load-capacity interval is to supply a charging voltage which exceeds the nominal voltage, and thereby increase the upper SOC. As a general rule, the SOC increases with increasing charging voltage. However, it is far from unproblematic to elevate the charging voltage level. This may namely cause severe damage to the units which are included in the electric system being fed by the battery. For example, the service life of the light bulbs in a typical vehicle system may be reduced with up to 50% for each 0,5 Volt increase above the nominal voltage.

#### SUMMARY OF THE INVENTION

The object of the present invention is therefore to provide an energy storage solution, which alleviates the problems above, and thus offers an efficient charging without increasing the risk of damaging any units that are included in the electric circuitry to which the charged storage module is coupled.

According to one aspect of the invention, the object is achieved by the arrangement for storing electrical energy as initially described, wherein the DC-to-DC converter is adapted to control each of the voltage fractions to vary over time within an interval around a respective nominal module voltage.

An important advantage attained by this arrangement is that, for each electrical storage module, the charging voltage may be temporarily increased to a level which is sufficiently high to obtain an improved load capacity (of, say 95% SOC). At the same time, the overall voltage over the electrical storage modules may be held at a nominal level, i.e. a harmless voltage with respect to any units that are included in the relevant electric circuitry.

- According to one embodiment of this aspect of the invention, the interval represents a voltage variation of less than 25% of any of the nominal module voltages. This is namely sufficient to accomplish a significant improvement of the load capacity for a majority of the electrical storage modules types currently on the market. It is also important that the interval is held relatively narrow because otherwise the voltage level may become too low to maintain an adequate SOC in the modules during those periods when their voltage level is below the nominal value.
- 10 According to another embodiment of this aspect of the invention, the DC-to-DC converter is adapted to control the respective voltage fractions over the electrical storage modules, such that an average interval during which the voltage fraction exceeds the nominal module voltage is substantially equal with respect to
- 15 all the modules. This is desirable because thereby all the modules obtain an equally good load capacity (provided, of course, that they have essentially the same electrochemical characteristics).
- 20 According to yet another embodiment of this aspect of the invention, the DC-to-DC converter is adapted to control the respective voltage fractions over the electrical storage modules, such that in average, an equally large fraction of the DC-system voltage is distributed to each module. Again, this is preferable from a load capacity point-of-view, at least if the modules have
- 25 essentially the same electrochemical characteristics.
- 30 According to still another embodiment of this aspect of the invention, two or more of the electrical storage modules are included in a common battery unit. It is here presumed that a separate set of access points is provided for each module, and that these access points are coupled to the DC-to-DC converter, such that the modules may be charged individually. This design is advantageous, since in some applications it may be appropriate to enclose all, or at least some, of the modules in one battery unit, for example due for environmental reasons.

According to another embodiment of this aspect of the invention, the electrical storage modules are adapted to deliver energy to an electrical system of a vehicle via the first and second terminals. Naturally, this is desirable because in most vehicle applications, the storage modules will be required to deliver energy also during the normal charging procedure.

According to another aspect of the invention the object is achieved by a method of charging a number of electrical storage modules as initially described, wherein each of the voltage fractions is controlled to vary over time within an interval around a respective nominal module voltage. Thus, for each electrical storage module, the charging voltage may be temporarily increased to a level which is sufficiently high to obtain a significant improvement of the load capacity, without increasing the overall voltage to a level that may cause damages to any units that are included in the relevant electric circuitry.

According to one embodiment of this aspect of the invention, the interval represents a voltage variation of less than 25% of any of the nominal module voltages. As mentioned above, this is normally sufficient to improve the electrical storage modules' load capacity significantly in comparison with a standard nominal-voltage charging procedure.

According to another embodiment of this aspect of the invention, the respective voltage fractions over the electrical storage modules are controlled such that an average interval during which the voltage fraction exceeds the nominal module voltage is substantially equal with respect to all the modules. Namely, thereby all the modules obtain an equally good load capacity, at least if they have essentially the same electrochemical characteristics.

According to another embodiment of this aspect of the invention, the respective voltage fractions over the electrical storage modules are controlled such that, in average, an equally large

fraction of the DC-system voltage is distributed to each module. As stated above, this is preferable from a load capacity point-of-view if the modules have essentially the same electrochemical characteristics.

- 5 According to a further aspect of the invention the object is achieved by a computer program directly loadable into the internal memory of a computer, comprising software for controlling the above proposed method when said program is run on a computer.
- 10 According to another aspect of the invention the object is achieved by a computer readable medium, having a program recorded thereon, where the program is to make a computer control the above proposed method.

Hence, the invention offers an excellent battery charging  
15 approach for any electrical system wherein a high load capacity is vital. The proposed solution is thereby particularly well suited for vehicle applications.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is now to be explained more closely by  
20 means of embodiments, which are disclosed as examples, and with reference to the attached drawings.

Figure 1 shows a block diagram over an arrangement for storing electrical energy according to a first embodiment of the invention,

25 Figure 2 shows graph for different charging voltages as functions of time according to the first embodiment of the invention,

Figures 3a-b show graphs specifically illustrating the charging voltages according to the first embodiment of the  
30 invention,

Figure 4 shows a block diagram over an arrangement for

storing electrical energy according to a second embodiment of the invention,

Figure 5 shows graph for different charging voltages as functions of time according to the second embodiment of the invention,

Figures 6a-c show graphs specifically illustrating the charging voltages according to the second embodiment of the invention, and

Figure 7 shows a flow diagram which illustrates the general method according to the invention.

## DESCRIPTION OF EMBODIMENTS OF THE INVENTION

A block diagram over an arrangement for storing electrical energy according to a first embodiment of the invention is shown in figure 1. The arrangement includes an electric charge source 110, such as a DC-generator, a DC-to-DC converter 120 and first and second electrical storage modules 131 and 132 respectively, for example in the form of lead acid batteries.

The electric charge source 110 produces a DC-system voltage  $V_{TOT}$  and is connected to a first and a second terminal T1 and T2 respectively, such that the DC-system voltage  $V_{TOT}$  is applied between the first terminal T1 and the second terminal T2.

The electrical storage modules 131 and 132 are connected in series to one another with a first terminal polarity, e.g. negative, of the first module 131 coupled to a second terminal polarity, e.g. positive, of the second module 132. The first electrical storage module 131 is also connected to the first terminal T1 with a second terminal polarity, e.g. positive, and correspondingly, the second electrical storage module 132 is connected to the second terminal T2 with a first terminal polarity, e.g. negative. Thus, the DC-system voltage  $V_{TOT}$  is applied over the electrical storage modules 131 and 132.



The DC-to-DC converter 120 is coupled to both the terminals T1 and T2, and to a point between the first and second modules 131 and 132 by means of an electrical connection 140. In practice, this connection point may be identical to one of the module's 131 or 132 terminals. The DC-to-DC converter 120 receives incoming power from the electric charge source 110 via the terminals T1 and T2. The DC-to-DC converter 120 also delivers a voltage fraction  $V_1$  and  $V_2$  of the DC-system voltage  $V_{TOT}$  to each of the modules 131 and 132. By means of the electrical connection 140, the DC-to-DC converter 120 controls the voltage fractions  $V_1$  and  $V_2$ , such that they vary over time. However the sum of  $V_1$  and  $V_2$  is always equal to the DC-system voltage  $V_{TOT}$ .

Figure 2 shows a first graph which illustrates how the voltage fractions  $V_1$  and  $V_2$  may be varied over time. The diagram's vertical axis indicates the DC-system voltage  $V_{TOT}$ , which here is assumed to remain essentially constant at a nominal level  $V_{TOTn}$ . Theoretically, however, the DC-system voltage  $V_{TOT}$  may vary, and in practice it often fluctuates to some degree, although a constant voltage value is generally desirable. The horizontal axis of the diagram indicates the time  $t$ .

A dashed line represents a first nominal voltage value  $V_{1n}$  for a first voltage fraction  $V_1$  over the first electrical storage module 131. In this example, the first nominal voltage value  $V_{1n}$  is equal to  $V_{TOT}/2$ , however any other value is technically conceivable. Since the first nominal voltage value  $V_{1n}$  here is  $V_{TOT}/2$ , a second nominal voltage value  $V_{2n}$  for the second voltage fraction  $V_2$  over the second electrical storage module 132 also becomes  $V_{TOT}/2$ .

The voltage fractions  $V_1$  and  $V_2$  are varied within an interval  $V_D$  around the respective nominal module voltage  $V_{1n}$  and  $V_{2n}$ . According to this embodiment of the invention, the voltage fractions  $V_1$  and  $V_2$  over the respective modules 131 and 132 vary over time  $t$  by periodically applying a voltage  $V_1$  above the

first nominal voltage value  $V_{1n}$  over the first module 131 while applying a voltage  $V_2$  below the second nominal voltage value  $V_{2n}$  over the second module 132, and vice versa. Specifically, at a first time instance  $t_1$  a gradual decrease of the first voltage fraction  $V_1$  is initiated from an upper voltage level  $V_{1+}$ , and at a second time instance  $t_2$  a lower voltage level  $V_{1-}$  is reached. The difference between the upper voltage level  $V_{1+}$ , and the lower voltage level  $V_{1-}$  thus represents the interval  $V_D$ . Preferably, the first nominal voltage value  $V_{1n}$  corresponds to the average value of the upper voltage level  $V_{1+}$ , and the lower voltage level  $V_{1-}$ . Figure 3a shows a graph which illustrates the specific variation of the first voltage fraction  $V_1$ . At a third time instance  $t_3$ , a gradual increase of the first voltage fraction  $V_1$  is initiated, and at a fourth time instance  $t_4$ , the upper voltage level  $V_{1+}$  is again reached. At yet a later time fifth time instance  $t_5$ , the first voltage fraction  $V_1$  is lowered once more until the lower voltage level  $V_{1-}$  is reached at a sixth time instance  $t_6$ , and so on.

Consequently, during a first interval  $\tau_{super1}$  starting between the third and fourth time instances  $t_3$  and  $t_4$ , and ending between the fifth and sixth time instances  $t_5$  and  $t_6$ , the first voltage fraction  $V_1$  exceeds the first nominal module voltage  $V_{1n}$ . The charging performed during this first interval  $\tau_{super1}$  may thereby drive such an amount of energy into the first electrical storage module 131 that it obtains a relatively good load capacity. If, for example, the first nominal module voltage  $V_{1n}$  is 14 Volts, and the upper voltage level  $V_{1+}$  is 15 Volts, a load capacity of 95% SOC may be accomplished.

Figure 3b shows a graph which illustrates a corresponding variation of the second voltage fraction  $V_2$ . Here, a second interval  $\tau_{super2}$  during which the second voltage fraction  $V_2$  exceeds the second nominal module voltage  $V_{2n}$  starts between the first and second time instances  $t_1$  and  $t_2$ , and ends between the third and fourth time instances  $t_3$  and  $t_4$ . Thus, the charging performed during the second interval  $\tau_{super2}$  may drive such an amount of energy into the second electrical storage module 132 that also

this module obtains a relatively good load capacity.

A variation of the voltage fractions  $V_1$  and  $V_2$  between 13 Volts and 15 Volts as exemplified above, is equivalent to the interval  $V_D$  representing a voltage variation of  $2/14 \approx 14\%$  of the nominal module voltages  $V_{1n}$  and  $V_{2n}$  (which are both 14 Volts). Such a variation is normally sufficient to ensure a first-rate load capacity of the electrical storage modules. In any case, according to one embodiment of the invention, the interval  $V_D$  represents a voltage variation of less than 25% of any of the nominal module voltages  $V_{1n}$  and  $V_{2n}$ .

Moreover, the DC-to-DC converter controls the respective voltage fractions  $V_1$  and  $V_2$  over the electrical storage modules 131 and 132 respectively, such that the first and second intervals  $\tau_{super1}$  and  $\tau_{super2}$  are approximately equal, at least on average. Thereby, both the modules 131 and 132 will have essentially the same load capacity (provided that their electrochemical characteristics are essentially the same). Nevertheless, the length of the intervals during which the voltage fractions  $V_1$  and  $V_2$  are temporarily constant, (e.g. between  $t_2$  and  $t_3$ ; and between  $t_4$  and  $t_5$  respectively) is arbitrary and may be made infinitely short (i.e.  $t_2 = t_3$  and  $t_4 = t_5$ ), such that voltage fractions  $V_1$  and  $V_2$  vary continuously.

Although in many applications it may be desirable to control the respective voltage fractions  $V_1$  and  $V_2$ , such that they voltage, on average, are substantially equally large, this is not necessary from a technical point of view. On the contrary, the nominal voltage values may very well be individually different. Furthermore, the super charging intervals (e.g.  $\tau_{super1}$  and  $\tau_{super2}$  above) may have different extensions in time.

Figure 4 shows a block diagram over an arrangement for storing electrical energy according to a second embodiment of the invention, which elucidates these aspects of the invention. The arrangement includes an electric charge source 410, for

example in the form of a DC-generator, a DC-to-DC converter 420 and first, second and third electrical storage modules 430A, 430B and 430C respectively, which may be lead acid batteries.

Also in this case, the electric charge source 410 produces a DC-system voltage  $V_{TOT}$  between a first terminal T1 and a second terminal T2. Moreover, the electrical storage modules 430A, 430B and 430C are all connected in series to one another with alternating terminal polarities. A first electrical storage module 430A is further connected to the first terminal T1 and a third electrical storage module 430C is connected to the second terminal T2. Thus, the DC-system voltage  $V_{TOT}$  is applied over all the electrical storage modules 430A, 430B and 430C.

The DC-to-DC converter 420 is electrically coupled to both the terminals T1 and T2, and to one point between each of the first, second and third modules 430A, 430B and 430C by means of respective electrical connections 441 and 442. The DC-to-DC converter 420 receives incoming power from the electric charge source 410 via the terminals T1 and T2. The DC-to-DC converter 420 also delivers a voltage fraction  $V_A$ ,  $V_B$ , and  $V_C$  of the DC-system voltage  $V_{TOT}$  to each of the modules 430A, 430B and 430C. Via the electrical connections 441 and 442, the DC-to-DC converter 420 controls the voltage fractions  $V_A$ ,  $V_B$ , and  $V_C$ , such that they vary over time. However the sum of  $V_A$ ,  $V_B$ , and  $V_C$  is always equal to the DC-system voltage  $V_{TOT}$ .

Figure 5 shows graph (corresponding to the graph in figure 2) which illustrates how the voltage fractions  $V_A$ ,  $V_B$ , and  $V_C$  may be varied over time. As is apparent from the figure 5, a first nominal voltage value  $V_{An}$  for the first voltage fraction  $V_A$  over the first electrical storage module 430A is lower than a second nominal voltage value  $V_{Bn}$  for the second voltage fraction  $V_B$  over the second electrical storage module 430B. The second nominal voltage value  $V_{Bn}$ , in turn, is lower than a third nominal voltage value  $V_{Cn}$  for the third voltage fraction  $V_C$  over the third electrical storage module 430C.

Also in this example, the DC-system voltage  $V_{TOT}$  is assumed to remain essentially constant at a nominal level  $V_{TOTn}$ , while the voltage fractions  $V_A$ ,  $V_B$ , and  $V_C$  are varied over time  $t$ . All variations, however, are held within an interval  $V_D$  around the  
 5 respective nominal voltage value  $V_{An}$ ,  $V_{Bn}$ , and  $V_{Cn}$ .

Figure 6a shows a graph which specifically illustrates how the first voltage fraction  $V_A$  is varied over time  $t$ . The DC-to-DC converter 420 initially controls the first voltage fraction  $V_A$  to a first upper voltage level  $V_{A+}$  above the first nominal voltage value  $V_{An}$  during a first interval  $t\Delta_1$ . During a subsequent second interval  
 10  $t\Delta_2$ , the first voltage fraction  $V_A$  is controlled to the first nominal voltage value  $V_{An}$ , and during a following third interval  $t\Delta_3$ , the first voltage fraction  $V_A$  is controlled to a first lower voltage level  $V_{A-}$  below the first nominal voltage value  $V_{An}$ . Then, during a  
 15 fourth interval  $t\Delta_4$ , the first voltage fraction  $V_A$  is again controlled to the first nominal voltage value  $V_{An}$ . The fourth interval  $t\Delta_4$ , completes a full period, such that a subsequent fifth interval  $t\Delta_5$  is equivalent to the first interval  $t\Delta_1$ .

Figure 6b shows a corresponding graph specifically illustrating  
 20 how the second voltage fraction  $V_B$  is varied over time  $t$ . The DC-to-DC converter 420 here controls the second voltage fraction  $V_B$  to, during the first and the second intervals  $t\Delta_1$  and  $t\Delta_2$ , attain a voltage value which is given by a second lower voltage level  $V_{B-}$  below the second nominal voltage value  $V_{Bn}$ .  
 25 Then, during the third and the fourth intervals  $t\Delta_3$  and  $t\Delta_4$ , the second voltage fraction  $V_B$  is controlled to a voltage value represented by a second upper voltage level  $V_{B+}$  above the second nominal voltage value  $V_{Bn}$ . A following fifth interval  $t\Delta_5$  is equivalent to the first interval  $t\Delta_1$ .

30 Finally, figure 6c shows a graph which specifically illustrates how, in this example, the third voltage fraction  $V_C$  is varied over time  $t$ . During the first interval  $t\Delta_1$ , the third voltage fraction  $V_C$  is controlled to the third nominal voltage value  $V_{Cn}$ , and during the second interval  $t\Delta_2$  it is controlled to attain a voltage value

given by a third upper voltage level  $V_{C+}$  above the third nominal voltage value  $V_{Cn}$ . Subsequently, during the third interval  $t\Delta_3$ , the third voltage fraction  $V_C$  is again controlled to the third nominal voltage value  $V_{Cn}$ , and during the fourth interval  $t\Delta_4$ , the third voltage fraction  $V_C$  is controlled to a voltage value at a third lower voltage level  $V_{C-}$  below the third nominal voltage value  $V_{Cn}$ . In analogy with the above, these four intervals  $t\Delta_1$ - $t\Delta_4$  completes a full period, such that a following fifth interval  $t\Delta_5$  is equivalent to the first interval  $t\Delta_1$ .

Thus, both the first voltage fraction  $V_A$  and the third voltage fraction  $V_C$  are varied over time  $t$ , such that they periodically attain their respective nominal voltage values  $V_{An}$  and  $V_{Cn}$ , namely during every second interval. The second voltage fraction  $V_B$ , however, is controlled such that it never attains its nominal voltage value  $V_{Bn}$ . It is nevertheless worth noticing that the DC-to-DC converter 420 controls all the voltage fractions  $V_A$ ,  $V_B$  and  $V_C$  to vary within the interval  $V_D$  around their respective nominal voltage value  $V_{An}$ ,  $V_{Bn}$  and  $V_{Cn}$ . According to one embodiment of the invention, the interval  $V_D$  represents a voltage variation of less than 25% of any of the nominal module voltages  $V_{An}$ ,  $V_{Bn}$  and  $V_{Cn}$ .

In order to sum up, the general method of charging a number of electrical storage modules according to the invention will now be described with reference to a flow diagram in figure 7.

A first step 710 receives the DC-system voltage, for example between a first and a second terminal. A subsequent step 720, converts the DC-system voltage into one voltage fraction per module. The step 720 also varies each voltage fraction over time within an interval around the respective nominal module voltage. Finally, a step 730 delivers the relevant voltage fractions to each of the modules.

Naturally, the steps 710, 720 and 730 are actually performed continuously and in pseudo-parallel to each other, such that a

DC-system voltage received in the step 710 essentially immediately is delivered to the electrical storage modules via the step 730.

- 5 All of the process steps, as well as any sub-sequence of steps, described with reference to the figure 7 above may be controlled by means of a programmed computer apparatus. Moreover, although the embodiments of the invention described above with reference to the drawings comprise computer apparatus and processes performed in computer apparatus, the invention thus
- 10 also extends to computer programs, particularly computer programs on or in a carrier, adapted for putting the invention into practice. The program may be in the form of source code, object code, a code intermediate source and object code such as in partially compiled form, or in any other form suitable for
- 15 use in the implementation of the process according to the invention. The carrier may be any entity or device capable of carrying the program. For example, the carrier may comprise a storage medium, such as a ROM (Read Only Memory), for example a CD (Compact Disc) or a semiconductor ROM, or a
- 20 magnetic recording medium, for example a floppy disc or hard disc. Further, the carrier may be a transmissible carrier such as an electrical or optical signal which may be conveyed via electrical or optical cable or by radio or by other means. When the program is embodied in a signal which may be conveyed
- 25 directly by a cable or other device or means, the carrier may be constituted by such cable or device or means. Alternatively, the carrier may be an integrated circuit in which the program is embedded, the integrated circuit being adapted for performing, or for use in the performance of, the relevant processes.
- 30 The term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components. However, the term does not preclude the presence or addition of one or more additional features, integers, steps or components or groups thereof.

The invention is not restricted to the described embodiments in the figures, but may be varied freely within the scope of the claims.

0-2081000



Claims

1. An arrangement for storing electrical energy comprising:
  - an electric charge source (110; 410) adapted to produce a DC-system voltage ( $V_{TOT}$ ) between a first terminal (T1) and a second terminal (T2),
  - a number of electrical storage modules (131, 132; 430A, 430B, 430C) connected in series between the first terminal (T1) and the second terminal (T2), and
  - a DC-to-DC converter (120; 420) coupled to the electric charge source (110; 410) and to each of the electrical storage modules (131, 132; 430A, 430B, 430C), the DC-to-DC converter being adapted to receive incoming power from the electric charge source (110; 410) and deliver a voltage fraction ( $V_1, V_2; V_A, V_B, V_C$ ) of the DC-system voltage ( $V_{TOT}$ ) to each of the modules (131, 132; 430A, 430B, 430C), **characterized in that** the DC-to-DC converter (120; 420) is adapted to control each of the voltage fractions ( $V_1, V_2; V_A, V_B, V_C$ ) to vary over time (t) within an interval ( $V_D$ ) around a respective nominal module voltage ( $V_{1n}, V_{2n}; V_{An}, V_{Bn}, V_{Cn}$ ).
2. An arrangement according to claim 1, **characterized in that** the interval ( $V_D$ ) represents a voltage variation of less than 25% of any of the nominal module voltages ( $V_{1n}, V_{2n}; V_{An}, V_{Bn}, V_{Cn}$ ).
3. An arrangement according to any one of the preceding claims, **characterized in that** the DC-to-DC converter (120) is adapted to control the respective voltage fractions ( $V_1, V_2$ ) over the electrical storage modules (131, 132) such that an average interval ( $\tau_{super1}, \tau_{super2}$ ) during which the voltage fraction ( $V_1, V_2$ ) exceeds the nominal module voltage ( $V_{1n}, V_{2n}$ ) is substantially equal with respect to all the modules (131, 132).
4. An arrangement according to any one of the preceding claims, **characterized in that** the DC-to-DC converter (120) is adapted to control the respective voltage fractions ( $V_1, V_2$ ) over

the electrical storage modules (131, 132) such that an average fraction of the DC-system voltage ( $V_{TOT}$ ) being distributed to each module is substantially equally large for all the modules (131, 132).

- 5     5.     An arrangement according to any one of the preceding claims, **characterized in that** two or more of the electrical storage modules (131, 132; 430A, 430B, 430C) are included in a common battery unit having a separate set of access points for each module, each of the access points being coupled to the
- 10     DC-to-DC converter (120; 420).
6.     An arrangement according to any one of the preceding claims, **characterized in that** the number of electrical storage modules (131, 132) is equal to two.
7.     An arrangement according to any one of the preceding
- 15     claims, **characterized in that** the electrical storage modules (131, 132; 430A, 430B, 430C) are adapted to provide power to an electrical system of a vehicle via the first and second terminals (T1, T2).
8.     An arrangement according to any one of the preceding
- 20     claims, **characterized in that** the electric charge source (110; 410) is an electric generator.
9.     A motor vehicle, **characterized in that** it comprises an arrangement for storing electrical energy according to any one of the claims 1 – 8.
- 25     10.     A method of charging a number of electrical storage modules (131, 132; 430A, 430B, 430C) connected in series between a first terminal (T1) and a second terminal (T2), comprising the steps of:
- 30         receiving a DC-system voltage ( $V_{TOT}$ ) between the first terminal (T1) and the second terminal (T2),

DC-to-DC converting the DC-system voltage ( $V_{TOT}$ ) into one voltage fraction ( $V_1, V_2; V_A, V_B, V_C$ ) per module (131, 132; 430A, 430B, 430C), and

- 5 delivering the respective voltage fraction ( $V_1, V_2; V_A, V_B, V_C$ ) to each of the modules (131, 132; 430A, 430B, 430C),  
characterized by the step of:

controlling each of the voltage fractions ( $V_1, V_2; V_A, V_B, V_C$ ) to vary over time ( $t$ ) within an interval ( $V_D$ ) around a respective nominal module voltage ( $V_{1n}, V_{2n}; V_{An}, V_{Bn}, V_{Cn}$ ).

- 10 11. A method according to claim 10, characterized by the interval ( $V_D$ ) representing a voltage variation of less than 25% of any of the nominal module voltages ( $V_{1n}, V_{2n}; V_{An}, V_{Bn}, V_{Cn}$ ).

12. A method according to any one of the claims 10 or 11,  
15 characterized by controlling the respective voltage fractions ( $V_1, V_2$ ) over the electrical storage modules (131, 132) such that an average interval ( $\tau_{super1}, \tau_{super2}$ ) during which the voltage fraction ( $V_1, V_2$ ) exceeds the nominal module voltage ( $V_{1n}, V_{2n}$ ) is substantially equal with respect to all the modules (131, 132).

- 20 13. A method according to any one of the claims 10 - 12, characterized by controlling the respective voltage fractions ( $V_1, V_2$ ) over the electrical storage modules (131, 132) such that an average fraction of the DC-system voltage ( $V_{TOT}$ ) being distributed to each module is substantially equally large for all the modules (131, 132).

- 25 14. A method according to any one of the claims 10 - 13, characterized by the number of electrical storage modules (131, 132) being equal to two.

- 30 15. A computer program directly loadable into the internal memory of a computer, comprising software for controlling the steps of any of the claims 10 - 14 when said program is run on the computer.

16. A computer readable medium, having a program recorded thereon, where the program is to make a computer control the steps of any of the claims 10 – 14.

03-05-22

**Abstract**

The present invention relates to storage of electrical energy in a number of electrical storage modules, which are connected in series to one another. A DC-system voltage ( $V_{TOT}$ ) is received and DC-to-DC converted into one voltage fraction ( $V_1$ ,  $V_2$ ) per  
5 electrical storage module. The respective voltage fractions ( $V_1$ ,  $V_2$ ) are delivered to each module and varied over time ( $t$ ) within an interval ( $V_D$ ) around a respective nominal module voltage ( $V_{1n}$ ,  $V_{2n}$ ). Thereby, the charging voltage is temporarily increased to a level which is sufficiently high to obtain an improved  
10 load capacity for each module. At the same time, the overall voltage over the electrical storage modules may be held at a harmless level with respect to any units that are included in the relevant electric circuitry.

15 (Fig. 2)

PRV 03-05-22

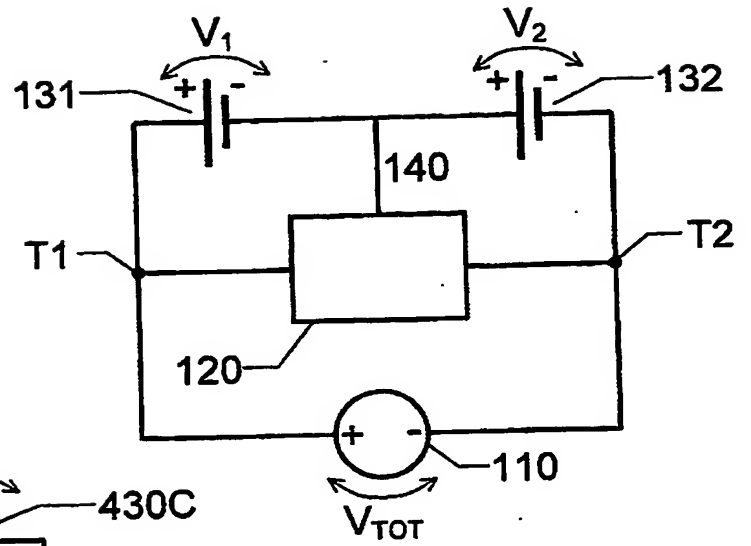


Fig. 1

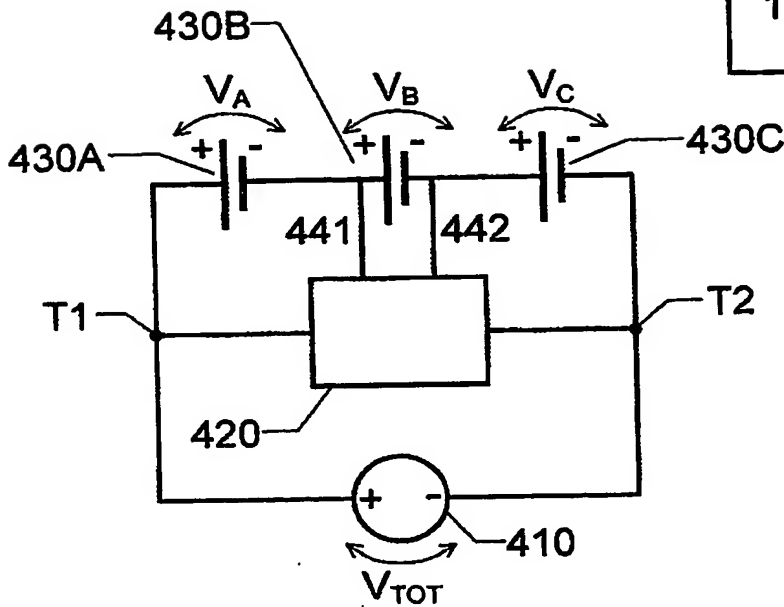


Fig. 4

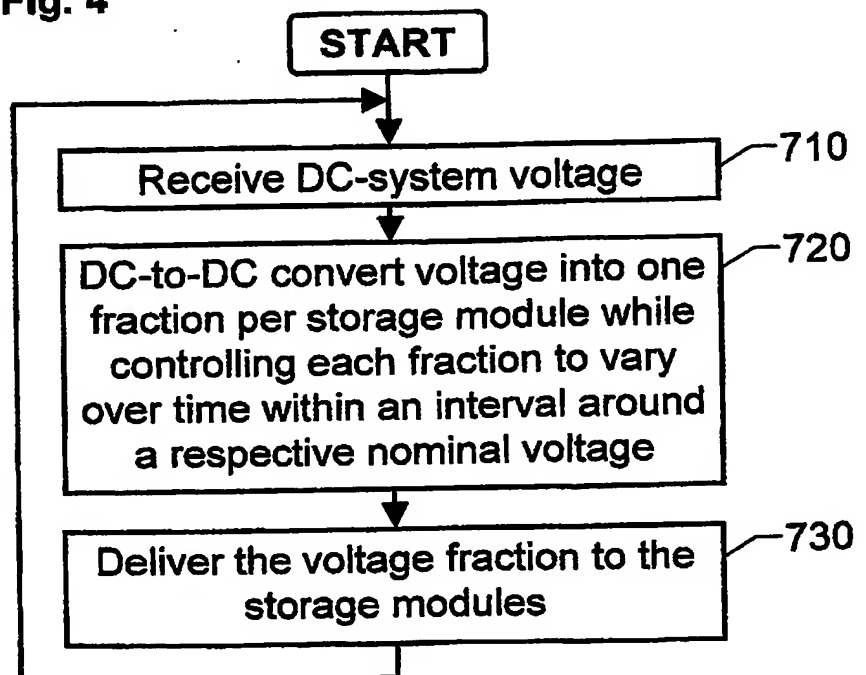


Fig. 7

2/3

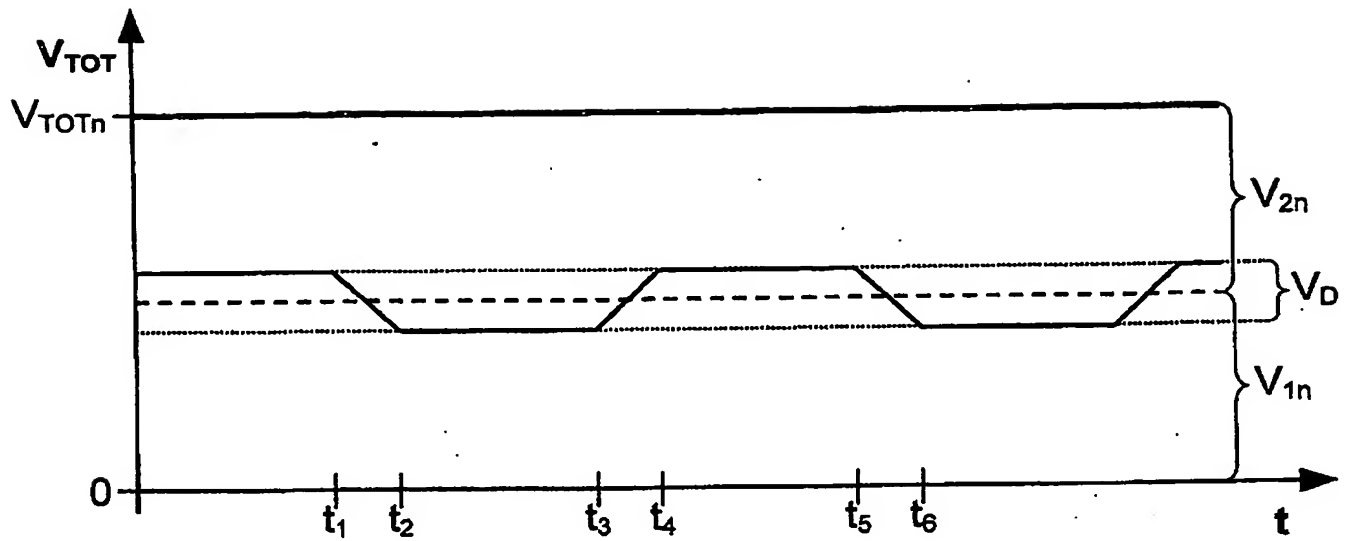


Fig. 2

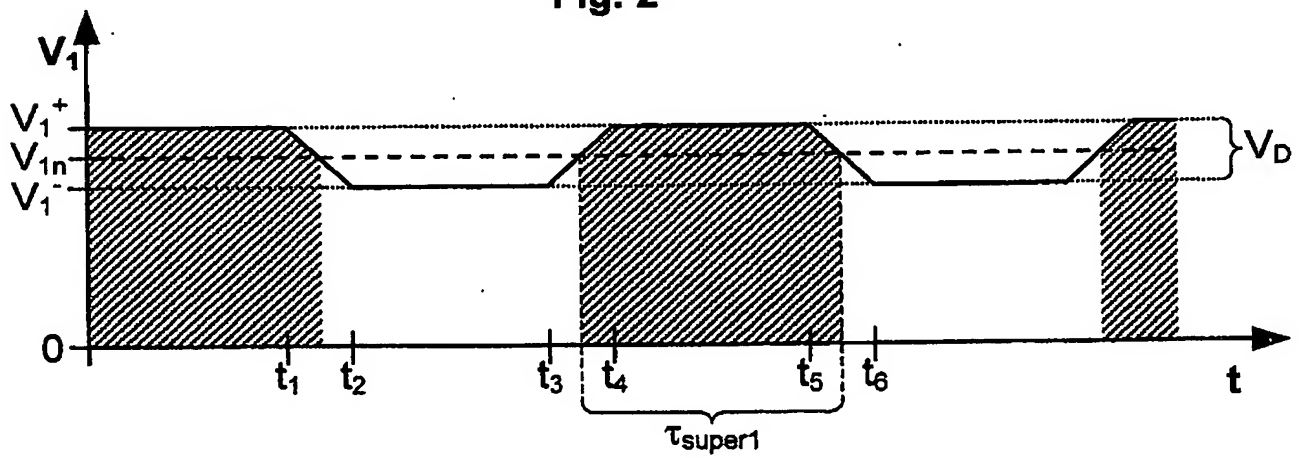


Fig. 3a

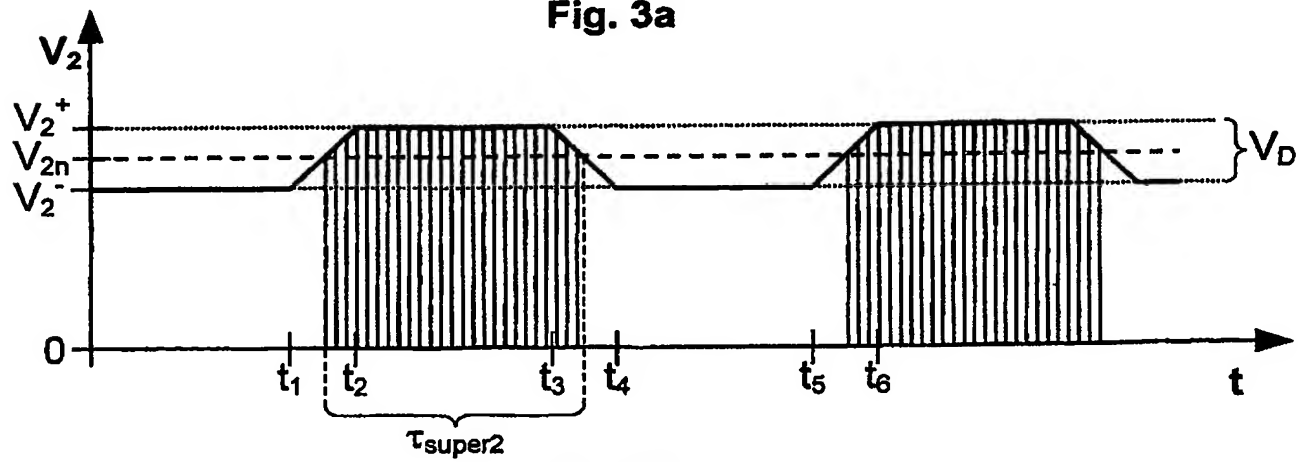


Fig. 3b

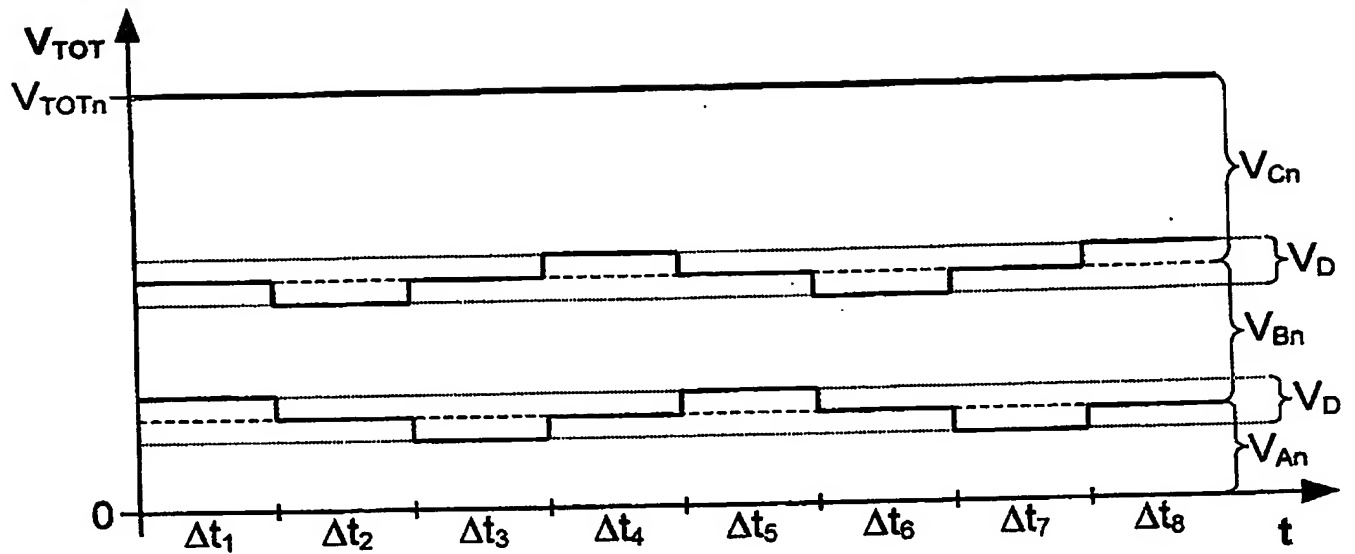


Fig. 5

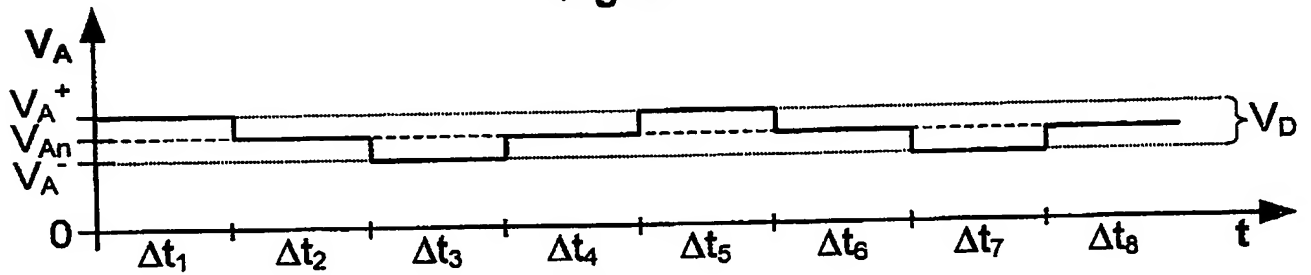


Fig. 6a

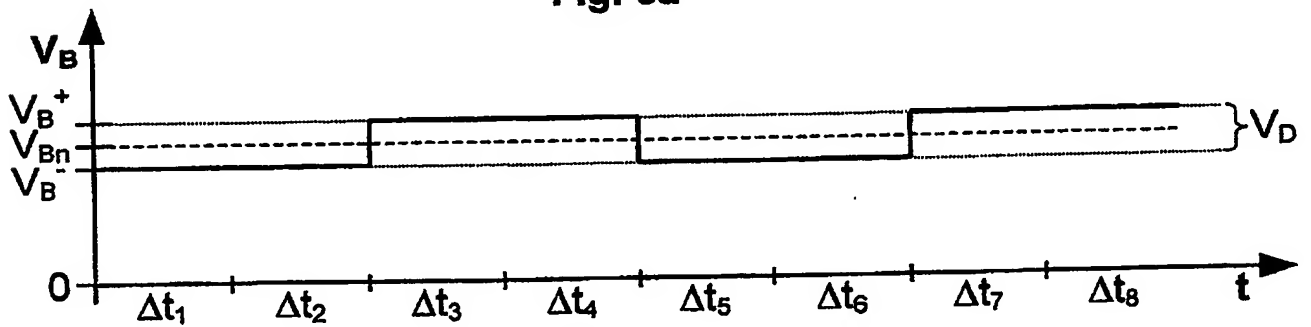


Fig. 6b

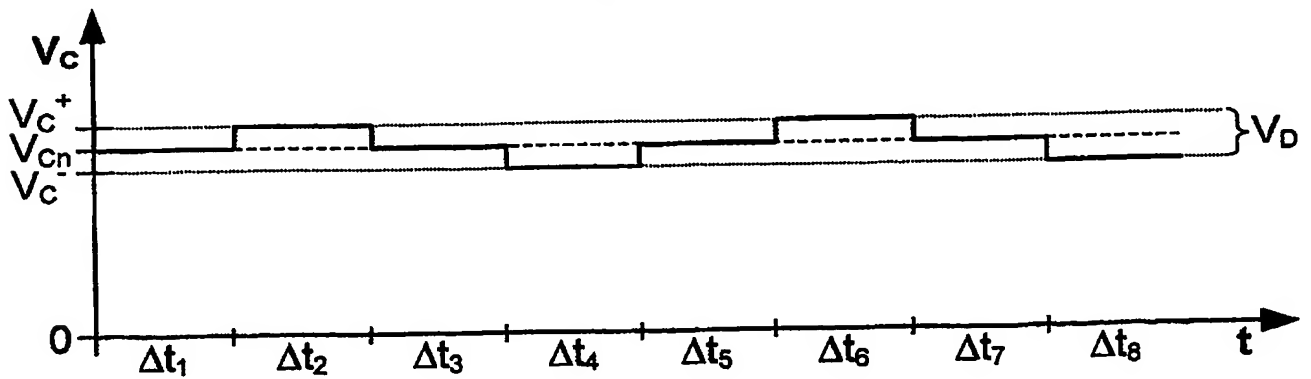


Fig. 6c



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant:

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**